


NOTE:

1. DISPLAY TYPE: A:HTN, POSITIVE, TRANSMISSIVE  
B:TN, POSITIVE, TRANSMISSIVE
2. VIEWING DIR.: 6:00
3. DRIVE METHOD: 1/4DUTY, 1/3BIAS, Vop5V
4. OP. TEMP.: -20°C~65°C
5. ST. TEMP.: -30°C~75°C
6. WITH U.V. FILTER

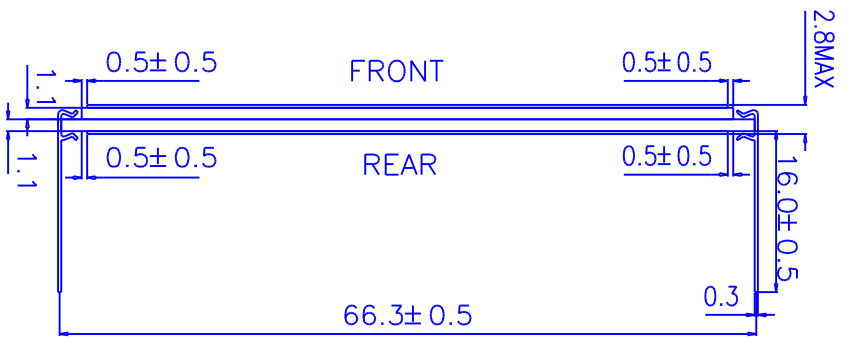

**石家庄冠晶电子科技有限公司**

型号	图号
制图	日期
审核	页数
批准	
缩版尺寸	X:0.1 Y:0.1