


VIEWING DIR. 12:00



1	2	3	4	5	6	7	8	9	10
IN/RS	V4	V3	V2	V1	V0	VR	C2-	C2+	C1-
11	12	13	14	15	16	17	18	19	20
C1+	C3-	C3+	VOUT	VDD	VDD	VSS	D7	D6	D5
21	22	23	24	25	26	27	28	29	30
D4	D3	D2	D1	D0	RD	WR	RS	RESETB	CS1B

- NOTE:
1. FSTN, POSITIVE, REFLECTIVE
  2. 1/65DUTY, 1/9BIAS, VDP:10.2V
  3. DP:TEMP:-10°C-+60°C
  4. ST:TEMP:-30-+80°C
  5. Viewing Direction: 12:00
  6. USE LC TYPE ΔN=030
- NOTE A
1. FSTN, POSITIVE, REFLECTIVE
  2. 1/65DUTY, 1/9BIAS, VDP:10.2V
  3. DP:TEMP:-10°C-+60°C
  4. ST:TEMP:-30-+80°C
  5. Viewing Direction: 12:00
  6. USE LC TYPE ΔN=005

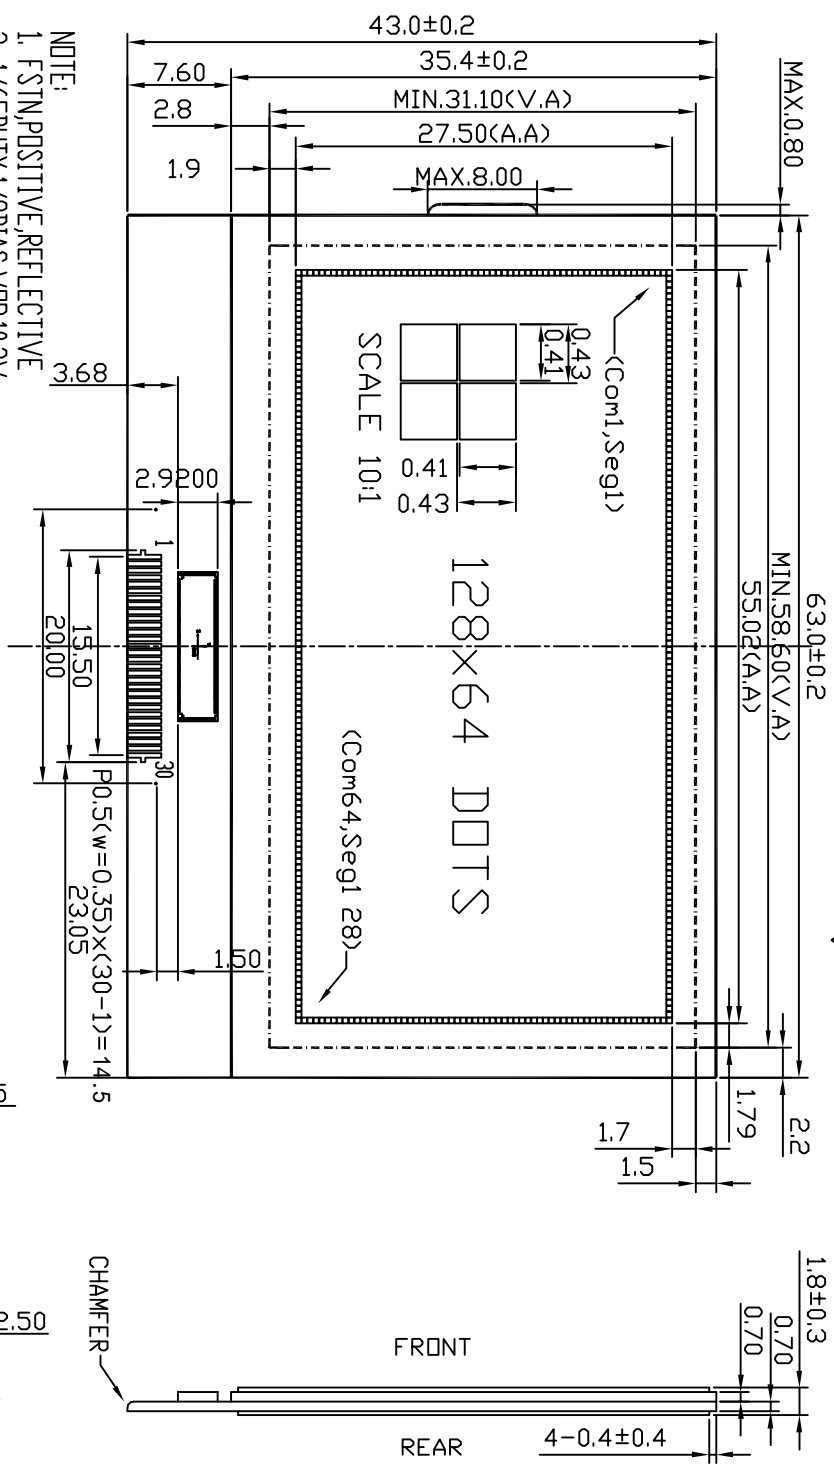