



(8 characters × 1 line)

1. DIMENSIONAL OUTLINE

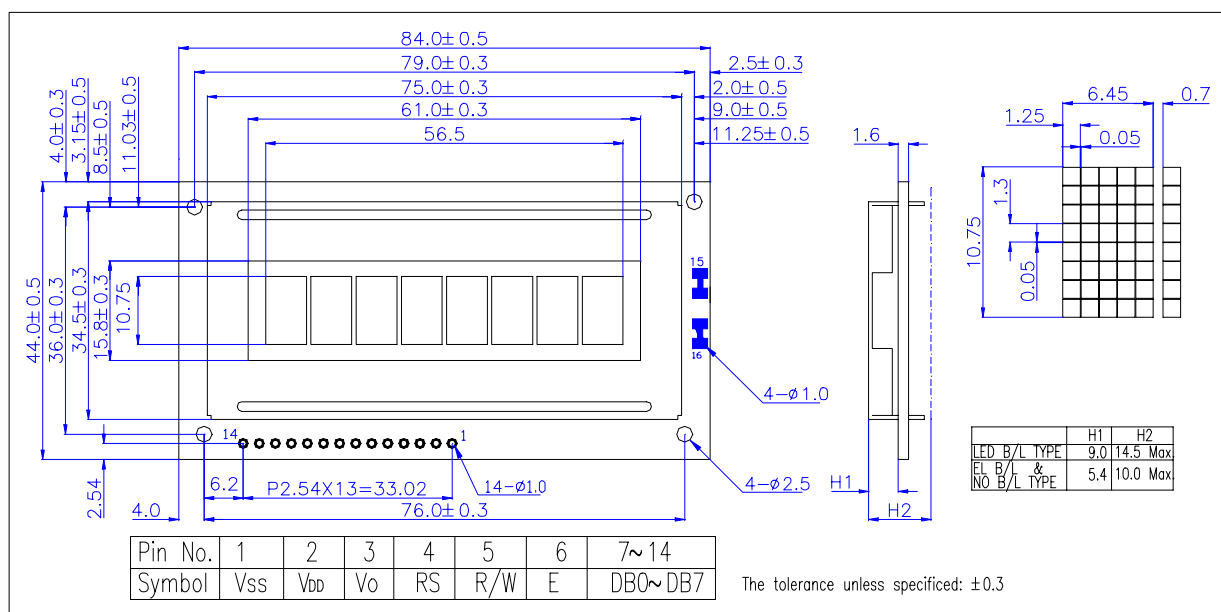

2. BLOCK DIAGRAM

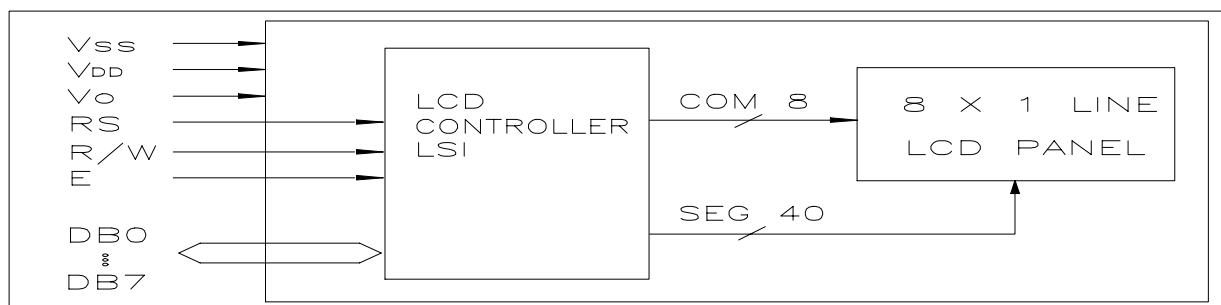

3. MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	UNIT	REMARK
DIMENSIONAL OUTLINE	84.0 (W) × 44.0 (H) × 10.0/14.5 MAX. (T)	mm	*REFERENCE DIMENSIONAL OUTLINE
VIEWING AREA	61.0 (W) × 15.8 (H)		
CHARACTER PITCH	7.15		
CHARACTER SIZE	6.45 (W) × 10.75 (H)		
NUMBER OF CHARACTERS	8 CHARACTERS × 1 LINES	—	
DOT PITCH	1.30 (W) × 1.35 (H)	mm	
DOT SIZE	1.25 (W) × 1.30 (H)	mm	

4. ELECTRICAL CHARACTERISTICS (Ta=25°C, VDD=5.0V±0.25V)

ITEM	SYMBOL	CONDITION	MIN	TYPE	MAX.	UNIT
INPUT HIGH VOLTAGE	V _{IH}	—	2.2V	—	V _{DD}	V
INPUT LOW VOLTAGE	V _{IL}	—	-0.3	—	0.6	V
OUTPUT HIGH VOLTAGE	V _{OH}	-I _{OH} =0.1mA	2.4	—	—	
OUTPUT LOW VOLTAGE	V _{OL}	I _{OL} =0.1mA	—	—	0.4	
SUPPLY CURRENT	I _{DD}	V _{DD} =5.0V	—	2.0	3.0	mA
OPERATING VOLTAGE FOR LCD	V _{DD} -V _O	Ta=25 °C	STN	—	5.0	V
			TN	—	5.0	V